

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A01J 5/017, 7/04, 7/02</b>		A1	(11) International Publication Number: <b>WO 99/03331</b>
		(43) International Publication Date: <b>28 January 1999 (28.01.99)</b>	
(21) International Application Number: <b>PCT/NL98/00398</b>		(81) Designated States: AU, CA, JP, NZ, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>9 July 1998 (09.07.98)</b>			
(30) Priority Data: <b>1006607 17 July 1997 (17.07.97) NL</b>		<b>Published</b> <i>With international search report. In English translation (filed in Dutch).</i>	
(71) Applicant (for all designated States except US): MAASLAND N.V. [NL/NL]; Weverskade 10, NL-3155 PD Maasland (NL).			
(72) Inventors; and (75) Inventors/Applicants (for US only): VAN DER LELY, Cornelis [NL/CH]; Brüschenrain 7, CH-6300 Zug (CH). VAN DER LELY, Olaf [NL/CH]; Weinbergstrasse 11, CH-6300 Zug (CH).			
(74) Agent: MULDER, Herman; 10 Weverskade, NL-3155 PD Maasland (NL).			

(54) Title: A CONSTRUCTION INCLUDING AN IMPLEMENT FOR AUTOMATICALLY MILKING ANIMALS

(57) Abstract

The invention relates to a construction including an implement for automatically milking animals, such as cows, which implement comprises teat cups (16) which are capable of being connected to the teats of an animal to be milked. The implement comprises separate cups (20) which are capable of being connected to the teats of an animal and by means of which these teats can be cleaned or disinfected and/or foremilked. The implement is further provided with switch means for switching the separate cups (20) from the cleaning position into a foremilking position and/or a stimulating position, in the latter position the animal being stimulated to give the milk faster and/or earlier.

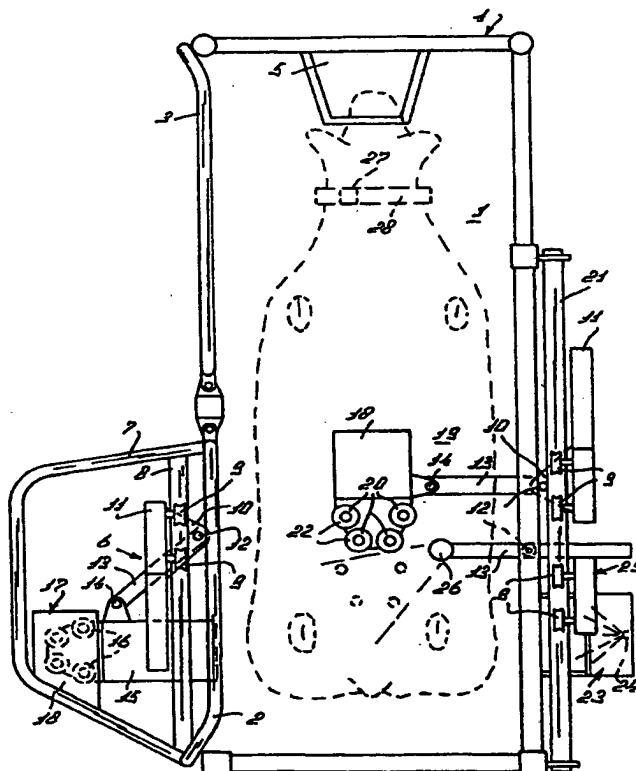

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A CONSTRUCTION INCLUDING AN IMPLEMENT FOR AUTOMATICALLY  
MILKING ANIMALS

5       The invention relates to a construction including  
an implement for automatically milking animals, such as cows,  
which implement comprises teat cups which are capable of  
being connected to the teats of an animal to be milked.

Such an implement is known.

10       With such a construction it is important to work  
very hygienically so that a high milk quality is obtained. In  
particular the teats of the animal to be milked should  
preferably be cleaned before milking. With a known construc-  
tion this takes place by means of the teat cups themselves.  
The disadvantage thereof is that cleaning fluid and/or  
contamination may remain behind in the teat cup and be mixed  
15       with the milk during milking. It will be obvious that this is  
undesirable.

Therefore, the invention aims at obviating the  
above-mentioned drawback or at least minimizing same.

20       In accordance with the invention, this is achieved  
in that the implement comprises separate cups which are  
capable of being connected to the teats of an animal and by  
means of which these teats can be cleaned and/or disinfected  
and/or foremilked. In this manner cleaning fluid and/or other  
contaminations are prevented from being mixed with the milk  
25       to be yielded thereafter.

30       According to a further inventive feature, the  
implement is provided with switch means for the purpose of  
switching the separate cups from the cleaning position into a  
foremilking position and/or a stimulating position, in the  
latter position the animal being stimulated to give the milk

faster and/or earlier. In order to facilitate the connection of separate cups, according to an inventive feature, the separate cups have a larger diameter than the teat cups. The separate cups preferably have a diameter being approximately one and a half times as large as the diameter of the teat cups. For the purpose of realizing a proper connection of the separate cups to the teats, according to a further inventive feature, the separate cups are provided near their upper sides with an enlarged contact face with which they are situated against the udder of an animal.

In order to prevent the cleaning and/or disinfecting fluid of the separate cups from being mixed with milk, according to an aspect of the invention, the separate cups comprise a separate supply and/or discharge line for supplying and/or discharging cleaning fluid or disinfecting fluid or foremilk or hot water. For the purpose of adjusting the intensity of the cleaning, according to an inventive feature, the implement comprises pressure adjusting means with the aid of which the pressure of the fluid and/or the air in the supply line can be adjusted.

For the purpose of a further automation of the implement, according to an inventive feature, the implement comprises a robot for the teat cups and a robot for the separate cups, with the aid of which robots the teat cups and the separate cups respectively can be connected to the teats of an animal. For determining the position of the teats, according to an inventive feature, the implement comprises a further robot with a detector disposed thereon. According to an inventive feature, the detector comprises a laser and/or an ultrasonic sensor and/or a camera.

In accordance with another inventive feature, the implement comprises a first cleaning device for cleaning the teat cups, as well as a second cleaning device for cleaning the separate cups. According to a further inventive feature, the first and the second cleaning device respectively comprise a space in which the teat cups and the separate cups respectively are cleaned with fluid and/or air. In this manner there is worked very hygienically, which has a favourable influence on the milk quality. In order to prevent

cleaning fluid from splashing away, according to an inventive feature, the first and the second cleaning device comprise a space in which the teat cups and separate cups having an other function than the teat cups can be cleaned respectively. In a preferred embodiment of the invention, the first cleaning device is located at one longitudinal side of the milk box, while the second cleaning device is situated at the other longitudinal side. According to again another inventive feature, in both spaces of the cleaning devices there are disposed storage means for storing the teat cups and the separate cups after operation. This prevents the teat cups and the separate cups from being contaminated. According to an aspect of the invention, the teat cups and/or the separate cups are connected to transport cables with the aid of which they can be moved to the storage means. Therefore, the invention also relates to a construction including an implement for automatically milking animals, such as cows, which implement comprises teat cups which are capable of being connected to the teats of an animal to be milked, characterized in that the implement comprises separate cups for cleaning and disinfecting the teats and for foremilk, the teat cups and/or the separate cups being connected to transport cables with the aid of which, after operation, they can be conveyed to the storage means.

For the purpose of an efficient way of working, according to an inventive feature, the implement comprises switch means with the aid of which the first cleaning device can be activated for cleaning therewith the teat cups when the separate cups are operative, as well as switch means with the aid of which the second cleaning device can be activated for cleaning therewith the separate cups when the teat cups are operative. Therefore, the invention furthermore relates to a construction including an implement for automatically milking animals, such as cows, which implement comprises teat cups which are capable of being connected to the teats of an animal to be milked, characterized in that the implement comprises separate cups for cleaning and/or disinfecting the teats and/or for foremilk, as well as switch means with the aid of which the separate cups can be cleaned during

operation of the teat cups and with the aid of which the teat cups can be cleaned during operation of the separate cups. According to an aspect of the invention, the switch means are activated each time after operation of both the teat cups and the separate cups.

In accordance with an inventive feature, the implement comprises a computer and/or an animal identification system. According to a further inventive feature, in the computer and/or the animal identification system there is recorded per animal or per group of animals whether the teats are stimulated by means of the teat cups or the separate cups and by means of which cups foremilk takes place.

The invention will now be explained in further detail with reference to the accompanying drawing.

Figure 1 shows schematically a plan view of a milk box, a robot arm with teat cups and a robot arm with separate cups being disposed therein.

Figure 1 shows a plan view of a milk box 1 provided with an entrance door 2 and an exit door 3. Near the front side of the milk box 1, a feed trough 5 is fitted to the frame 4, in which feed trough 5 fodder, such as concentrate, can be fed to an animal present in the milk box 1.

To the entrance door 2 there is fitted a milking robot 6. The milking robot 6 is surrounded by a U-shaped protective bracket 7 which is disposed on the entrance door 2. Between the two legs of the U-shaped protective bracket 7 there is disposed a longitudinal guide means 8 extending in the longitudinal direction of the milk box 1 and along which the milking robot 6 can be moved via a pair of rollers 9 by a (non-shown) motor, preferably a stepper motor. The milking robot 6 comprises a first robot arm 10 which is fastened to a support beam 11 to which the rollers 9 are attached. The first robot arm 10 is hingeably connected to a second robot arm 13 via a vertical axis 12. The second robot arm 13 itself is hingeably connected about a vertical axis 14 to a third robot arm 15 carrying four teat cups 16 at one of its ends. In the position shown in Figure 1 the teat cups 16 are inoperative. The first, second and third robot arms 10; 13;

15 can be rotated relative to each other by (non-shown) motors, such as stepper motors and/or pneumatic or hydraulic, possibly servo-controlled cylinders. The milking robot 6 can further be moved in height by a (non-shown) hingeable arm construction.

To the U-shaped protective bracket 7 there is further fitted a first cleaning device 17 for cleaning of the teat cups. The first cleaning device 17 comprises a box-shaped housing 18 in which the teat cups 16 can be cleaned by means of fluid and/or air.

Near the other longitudinal side of the milk box 1 there is arranged a robot 19 with separate cups 20 which are capable of being connected to the animal's teats which can thus be cleaned and/or disinfected and/or foremilked and/or stimulated to give milk. Like the previous milking robot 6, the robot 19 is movable via a longitudinal guide means 21 which is fastened to the frame 4 of the milk box 1 and extends in the longitudinal direction of the milk box 1. Apart from the cups 20, the robot 19 is designed in the same manner and therefore indicated in Figure 1 by the same reference numerals. The separate cups 20 have a larger diameter, preferably one and a half times as large as the teat cups 16. Each of the separate cups 20 is further provided with a relatively large contact face 22 with which the cup, when it is connected to a teat, is situated against the udder of the animal. The large contact face 22 ensures that the interior space of the separate cup 20 is properly shut off from the environmental atmosphere.

Near the same longitudinal side as where the robot 19 is arranged, near the rear side of the milk box 1 there is disposed a second cleaning device 23 for cleaning and/or disinfecting the separate cups 20. Like the first cleaning device 17, the second cleaning device 23 is provided with a box-shaped housing 18 with a cleaning member 24 disposed therein by means of which cleaning member 24 water, air or disinfecting fluid can be spouted both into and against the separate cups 20.

To the longitudinal guide means 21 there is fitted a further robot 25 in a similar manner as the robot 19.

Therefore, corresponding parts are indicated by the same reference numerals. At the end of the arm 13 of the further robot 25 there is fitted a detector 26 with the aid of which the position of the teats of an animal can be determined. The detector 26 comprises a (non-shown) laser.

For the purpose of identifying the animal present in the milk box 1, the implement comprises a (non-shown) animal identification system and a computer which are capable of cooperating with a data carrier 27 which is disposed around the neck of the animal via a collar 28.

The above described implement functions as follows:

The animal can enter the milk box 1 via the entrance door 2, whereafter the animal is identified by means of the (non-shown) animal identification system. If there has been established that the animal is to be milked and/or to be foremilked and/or the animal's teats are to be cleaned, there is fed to the animal a dosaged quantity of concentrate in the feed trough 5 via a (non-shown) concentrate dosage system. Then, by means of the further robot 25, the position of the teats of the animal is determined. Thereafter the robot 19 is activated and the separate cups 20 are connected to the teats of the animal. Depending on how the computer is preprogrammed the animal can subsequently be cleaned and/or disinfected and/or stimulated and/or foremilked by means of the separate cups 20. Thereafter the separate cups 20 are moved to the second cleaning device 23 and (non-shown) switch means are operated by the computer, in such a manner that the separate cups 20 are cleaned and/or disinfected by means of the second cleaning device 23. During cleaning of the separate cups 20 the milking robot 6 is activated and the teat cups 16 are connected to the teats of the animal to be milked, whereafter the animal is milked. When there has been established by the computer that the animal has been milked, the teat cups 16 are moved to the first cleaning device 17 with the aid of the milking robot 6. Subsequently the switch means are activated again by the computer, in such a manner that the teat cups 16 are cleaned and/or disinfected. It is also possible to adjust the switch means in such a manner that both the teat cups 16 and the separate cups 20 are cleaned by air and/or blown dry.



Cleaning and/or disinfecting or blowing dry or blowing clean of the teat cups 16 can go on, even when the entrance door 2 is opened for a next animal.

## CLAIMS

1. A construction including an implement for automatically milking animals, such as cows, which implement comprises teat cups (16) which are capable of being connected to the teats of an animal to be milked, characterized in that the implement comprises separate cups (20) having an other function than teat cups and which can be connected to the teats of an animal and by means of which these teats can be cleaned and/or disinfected and/or foremilked.
2. A construction as claimed in claim 1, characterized in that the implement is provided with switch means for switching the separate cups (20) from the cleaning position into a foremilking position and/or a stimulating position, in the latter position the animal being stimulated to give the milk faster and/or earlier.
3. A construction as claimed in claim 1 or 2, characterized in that the separate cups (20) have a larger diameter than the teat cups (16).
4. A construction as claimed in claim 3, characterized in that the diameter of the separate cups (20) is approximately one and a half times as large as the diameter of the teat cups (16).
5. A construction as claimed in any one of the preceding claims, characterized in that the separate cups (20) are provided near their upper sides with an enlarged contact face with which the separate cups (20) are situated against the udder of the animal when they are connected to the teats.
6. A construction as claimed in any one of the preceding claims, characterized in that the separate cups (20) have a separate supply and/or discharge line for supplying and/or discharging different fluids, such as cleaning fluid or disinfecting fluid or foremilk or hot water.
7. A construction as claimed in claim 6, characterized in that the implement comprises pressure adjusting means with the aid of which the pressure of the fluid in the supply line can be adjusted.
8. A construction as claimed in any one of the

preceding claims, characterized in that the implement comprises a milking robot (6) for the teat cups (16) and a robot (19) for the separate cups (20).

5 9. A construction as claimed in any one of the preceding claims, characterized in that the implement comprises a further robot (25) with a detector (26) disposed thereon for determining the position of the teats.

10 10. A construction as claimed in claim 9, characterized in that the detector (26) comprises a laser and/or an ultrasonic sensor and/or a camera.

11. A construction as claimed in any one of the preceding claims, characterized in that the implement comprises a cleaning device (17) for cleaning the teat cups (16).

15 12. A construction as claimed in any one of the preceding claims, characterized in that the implement comprises a cleaning device (23) for cleaning the separate cups (20).

20 13. A construction as claimed in any one of claims 1 to 10, characterized in that the implement is provided with a first cleaning device (17) for cleaning the teat cups (16), as well as a second cleaning device (23) for cleaning the separate cups (20).

25 14. A construction as claimed in claim 11, 12 or 13, characterized in that the cleaning device (17) and the cleaning device (23) respectively comprise a space in which the teat cups (16) and the separate cups (20) respectively are cleaned with fluid and/or air.

30 15. A construction including an implement for automatically milking animals, such as cows, which implement comprises teat cups (16) which are capable of being connected to the teats of an animal to be milked, characterized in that the construction comprises a first and a second cleaning device (17; 23) respectively comprising a space in which the teat cups (16) and separate cups (20) having an other  
35 function than the teat cups (16) can be cleaned respectively.

16. A construction as claimed in claim 13 or 14, characterized in that a cleaning device (17) is located at one longitudinal side of a milk box (1), while an other

cleaning device (23) is situated at the other longitudinal side.

17. A construction as claimed in any one of claims 14 to 16, characterized in that in both spaces there are disposed storage means for storing the teat cups (16) and the separate cups (20) after operation.

18. A construction as claimed in claim 17, characterized in that the teat cups (16) and/or the separate cups (20) are connected to transport cables with the aid of which they can be moved to the storage means.

19. A construction including an implement for automatically milking animals, such as cows, which implement comprises teat cups (16) which are capable of being connected to the teats of an animal to be milked, characterized in that the implement comprises separate cups (20) for cleaning and disinfecting the teats and for foremilk, the teat cups (16) and/or the separate cups (20) being connected to transport cables with the aid of which they can be moved to the storage means after operation.

20. A construction as claimed in any one of claims 11 to 19, characterized in that the implement comprises switch means with the aid of which the first cleaning device (17) can be activated for cleaning therewith the teat cups (16) when the separate cups (20) are operative.

21. A construction as claimed in any one of claims 11 to 19, characterized in that the implement comprises switch means with the aid of which the second cleaning device (23) can be activated for cleaning therewith the separate cups (20) when the teat cups (16) are operative.

22. A construction including an implement for automatically milking animals, such as cows, which implement comprises teat cups (16) which are capable of being connected to the teats of an animal to be milked, characterized in that the implement comprises separate cups (20) for cleaning and/or disinfecting the teats and/or for foremilk as well as switch means with the aid of which during operation of the teat cups (16) the separate cups (20) can be cleaned.

23. A construction including an implement for automatically milking animals, such as cows, which implement

comprises teat cups (16) which are capable of being connected to the teats of an animal to be milked, characterized in that the implement comprises separate cups (20) for cleaning and/or disinfecting the teats and/or for foremilking as well as switch means with the aid of which during operation of the separate cups (20) the teat cups (16) can be cleaned.


24. A construction as claimed in any one of claims 20 to 23, characterized in that the switch means are activated each time after operation of both the teat cups (16) and the separate cups (20).

25. A construction as claimed in any one of the preceding claims, characterized in that the implement comprises a computer and/or an animal identification system.

26. A construction as claimed in claim 25, characterized in that in the computer and/or the animal identification system there is recorded per animal whether the teats are stimulated and/or cleaned and/or disinfected by means of the teat cups (16) or the separate cups (20) and by means of which cups (16; 20) foremilking takes place.

27. A construction as claimed in any one of the preceding claims, characterized in that there can be determined per animal or per group of animals which operations the implement performs on the animal(s).

1/1

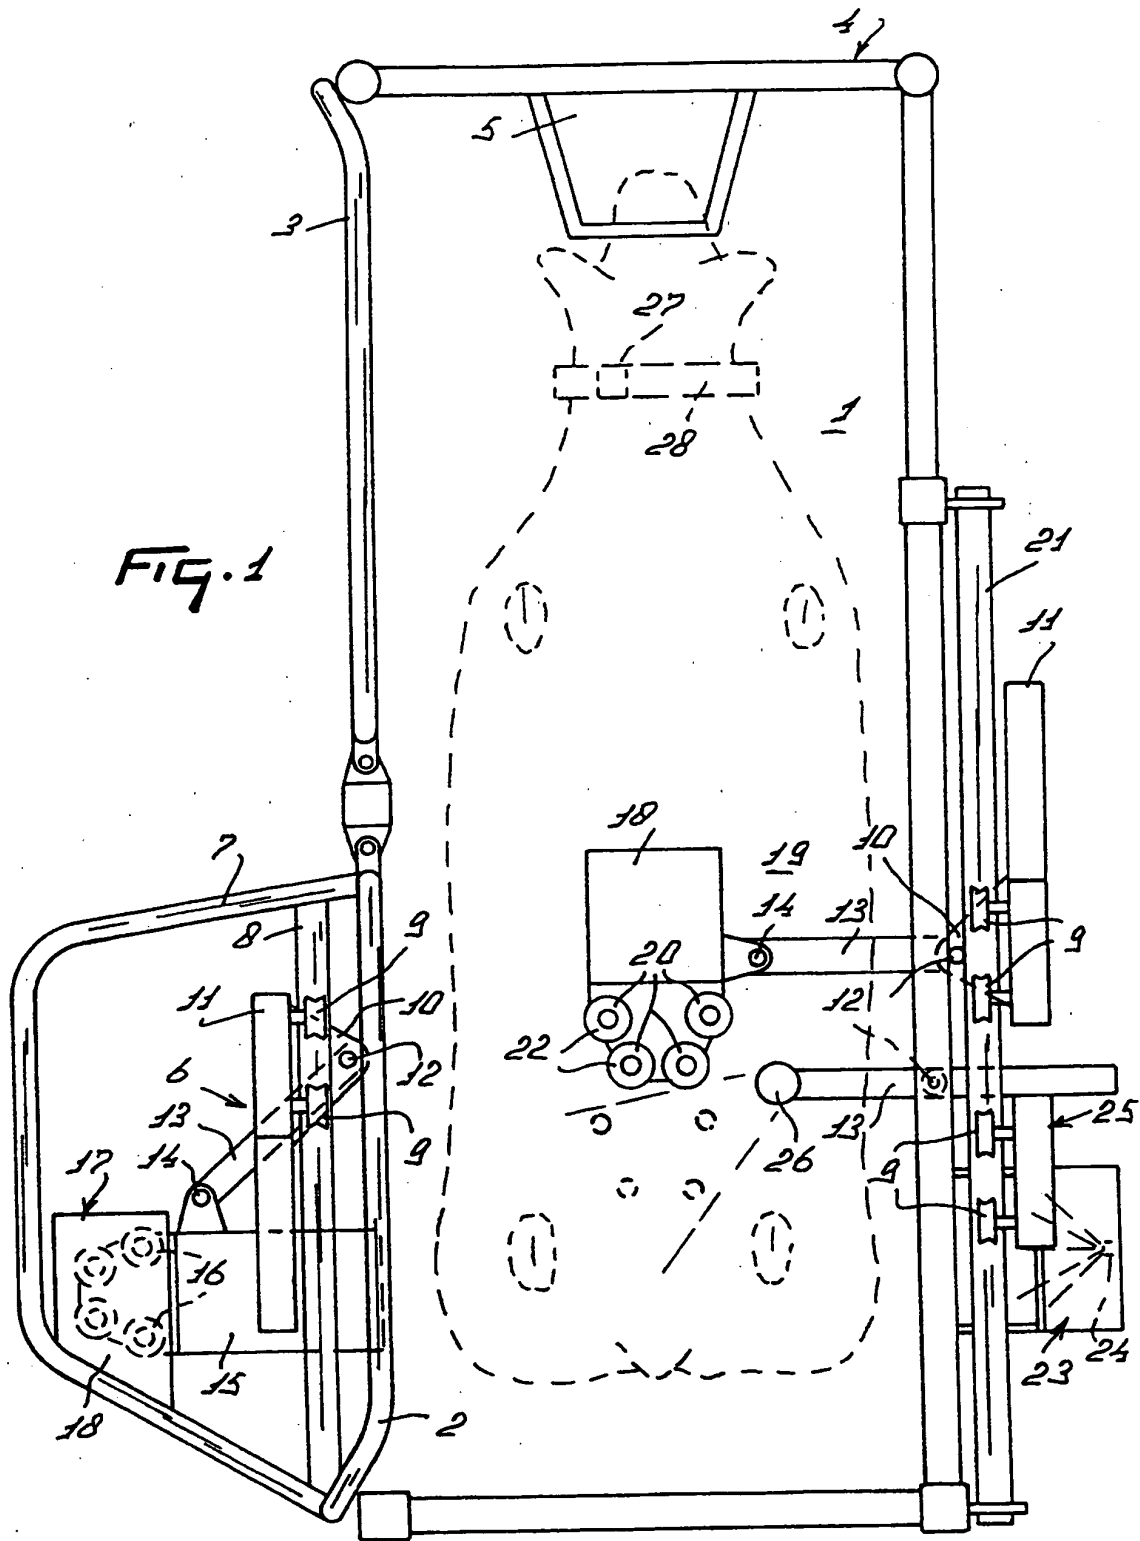

# INTERNATIONAL SEARCH REPORT

Intern. Application No

PCT/NL 98/00398

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 A01J5/017 A01J7/04 A01J7/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 728 412 A (MAASLAND NV) 28 August 1996 see column 1, line 6 - line 24 see column 1, line 39 - column 2, line 10 see column 4, line 43 - column 6, line 33	1, 19, 25
A	see claims; figures ---	2, 6, 8-10, 15, 19, 22, 23
X	WO 96 13151 A (MAASLAND NV ; LELY ARY VAN DER (NL); BERG KAREL VAN DEN (NL)) 9 May 1996	1
A	see page 1, line 9 - page 2, line 13  see page 4, line 5 - line 23 see page 5, line 36 - page 9, line 9 see claims; figures ---  -/--	7-10, 15, 19, 22, 23



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 October 1998

Date of mailing of the international search report

12/10/1998

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Piriou, J-C

# INTERNATIONAL SEARCH REPORT

Intern al Application No  
PCT/NL 98/00398

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 630 558 A (TEXAS INDUSTRIES INC) 28 December 1994	1,25
A	see column 1, line 8 - line 39  see column 2, line 32 - column 3, line 44 see column 8, line 30 - line 57 see claims; figures	2,8-10, 15,19, 22,23
A	EP 0 643 910 A (LELY NV C VAN DER) 22 March 1995  see column 1, line 19 - line 36 see column 1, line 46 - line 52 see column 4, line 37 - column 5, line 29 see claims; figures	1,8-10, 13,15, 19,22,23



# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/NL 98/00398

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0728412 A	28-08-1996	NL 9500364 A	01-10-1996
WO 9613151 A	09-05-1996	NL 9401802 A	03-06-1996
		EP 0737031 A	16-10-1996
		JP 9507758 T	12-08-1997
EP 0630558 A	28-12-1994	NL 9301098 A	16-01-1995
EP 0643910 A	22-03-1995	NL 9002047 A	16-04-1992
		DE 69109415 D	08-06-1995
		DE 69109415 T	04-01-1996
		DE 69125403 D	30-04-1997
		DE 69125403 T	23-10-1997
		DK 476771 T	17-07-1995
		EP 0476771 A	25-03-1992
		EP 0749683 A	27-12-1996